

Hardware Highlights



ANSI/BHMA A156.26-2012 American National Standard for Continuous Hinges

Standard ANSI/BHMA A156.26-2012 establishes requirements for architectural continuous hinges used in building construction. For further information, consult the full standard, ANSI/BHMA A156.26 for Continuous Hinges.

BHMA has created this series of *Hardware Highlights* to provide useful, accessible information about builders hardware for anyone with an interest in devices that hang, control, secure, and trim the doors. BHMA is the trade association which represents almost all of the North American manufacturers of builders hardware. One of its main activities since 1983 has been the development and maintenance of ANSI-approved standards for 35 separate product categories.

Product Performance: Purchasers of continuous hinges certified to A156.26 (<http://buildershardware.com/cpd>) can be assured products will perform to their expectations.

Below are an explanation and some examples of the evaluations conducted for certification:


DEFINITIONS	DURABILITY	SAFETY & SECURITY	APPEARANCE
The standard contains a full set of terminology relating to continuous hinges. Definitions such as “ Half Edge Mounted: Having one leaf applied to the surface of the butt edge of the door and the other leaf applied to the face of the door frame” help users to accurately specify and order hinges.	Building products are expected to last a long time, and builders hardware is no exception. Grade 1 hinges, for example, must pass a rigorous test through 2.5 million cycles of opening and closing on a door of a specified weight.	Hinges may be specified with additional safety and security features as needed for the application. The standard defines hospital hinges having sloped barrels, maximum security pins (MSP), and non-removable pins (NRP), among others.	An additional duty of builders hardware is to be aesthetically attractive and stay that way. Resistance to corrosion is evaluated through a salt spray test to ASTM B117 providing confidence in the ongoing appearance of the architectural metals and coatings.

Building Codes Builders hardware provides several attributes that are essential to building safety and performance, including egress and fire protection. BHMA locksets are designed to comply with all applicable requirements. For example, hardware for fire doors is evaluated and listed to UL 10C by an accredited third-party testing laboratory.

Sustainability Hinges contribute to building sustainability through their verified durability, as well as material characteristics such as recycled content and recyclability. The reliable closing and sealing of openings can also contribute to energy conservation. BHMA has developed Product Category Rules, which will further define sustainability requirements and guide life cycle assessments and environmental performance declarations.

Function Numbers and Illustrations: Another significant contribution of standards for product specification is a numbering system for lock function. Please consult A156.26 for the full list; an example is provided here:

A13021B
Section A, brass/bronze material, full surface hinges, no electrical modifications, for a 300 lb. door, grade 1, barrel hinge.

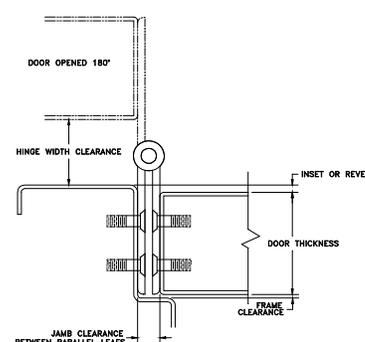

To purchase a copy of any BHMA Standard, go to www.buildershardware.com or call 800-699-9277.
This document is not a substitute for the full standard. Refer to the entire standard for full information.